


Cble / fil de thermocouple tamis en mylar isol en PVC Type K (IEC)



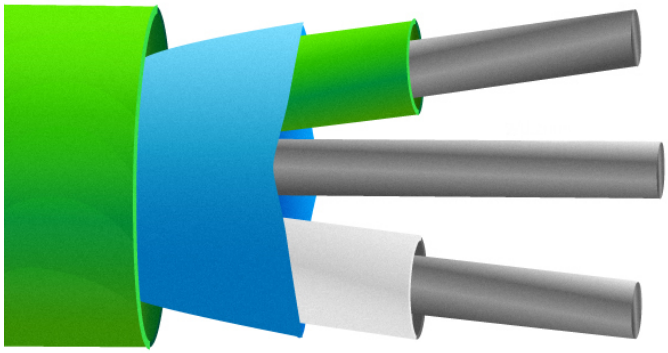

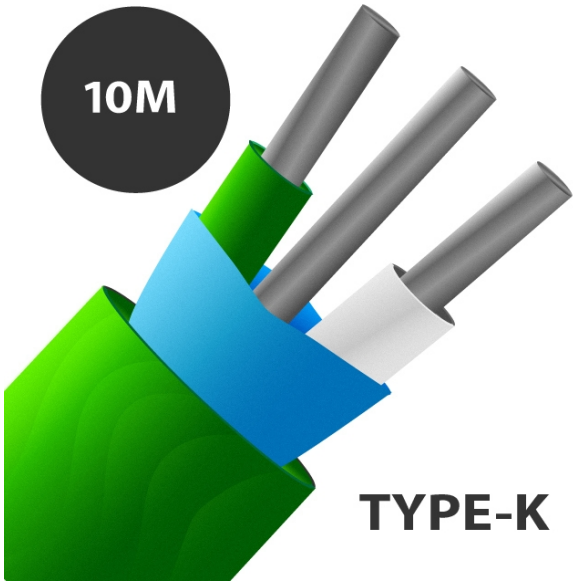

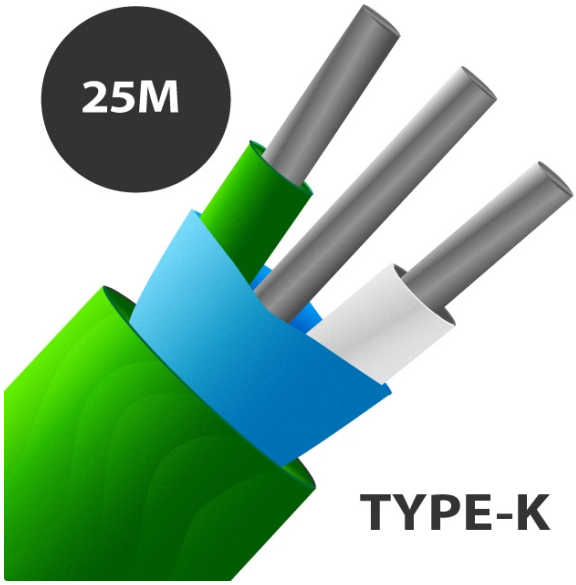

Labfacility are the UK's leading manufacturer of Temperature Sensors, Thermocouple Connectors and associated Temperature Instrumentation and stockings of Thermocouple Cables. The Company has been trading since 1971 and is ISO9001 accredited.

LABFACILITY
TEMPERATURE & PROCESS TECHNOLOGY

Datasheet

Caractristiques techniques

Specifications

General Description	Good general purpose insulation for 'light' environments. Waterproof and very flexible.
Cable Length	10m, 25m, 50m, 100m, 200m
Cable Type	Twisted cores & screened construction for reduced electrical noise
Core / Strands	7/0.2mm
Conductor Cross Section 7/0.2 (mm2)	0.219
Outer Colour	Green
+ Colour	Green
- Colour	White
Drain Wire	Yes
Insulation Material	PVC Insulated with a mylar screen
Loop Resistance 7/0.2 (Ohms per combined metre)	4.5
Max. Temperature	+105°C
Min. Temperature	-10°C
+ Conductor	Nickel Chromium
- Conductor	Nickel Aluminium

Screen	Yes
Screen Type	Mylar
Standards Met	Colour code (cores & jacket) to IEC-584-3
Thermocouple Type	K
Tolerance	Class 2