




LABFACILITY

TEMPERATURE & PROCESS TECHNOLOGY

Cble / fil de thermocouple paires plates Type K PFA IEC - brin 1/0,315 mm

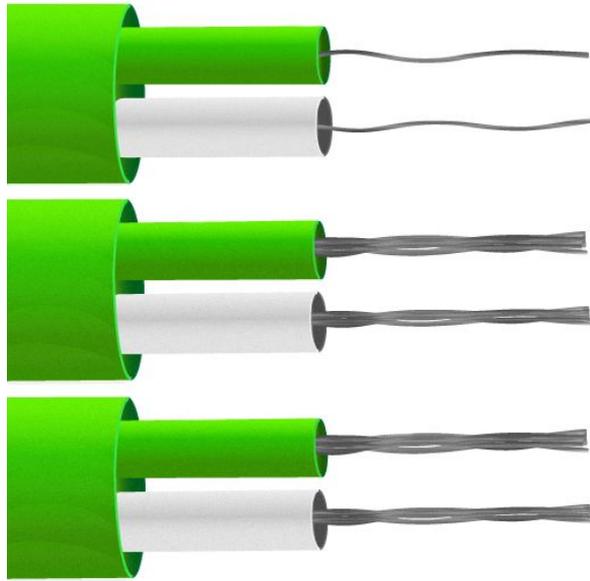

Labfacility are the UK's leading manufacturer of Temperature Sensors, Thermocouple Connectors and associated Temperature Instrumentation and stockings of Thermocouple Cables. The Company has been trading since 1971 and is ISO9001 accredited.

Cble / fil de thermocouple paires plates isolées en PFA - pos plat, cte cte et recouvert de PFA. Classe de tolérance 1

Vous ne trouvez pas ce dont vous avez besoin ? Appelez ou envoyez un e-mail notre équipe technique commerciale au +44 (0) 1243 871 280 ou sales@labfacility.com pour obtenir de l'aide dans la sélection des produits et le support technique

Caractéristiques techniques

Specifications

General Description	Resistant to oils, acids other adverse agents and fluids. Good mechanical strength and flexibility. PTFE better for steam/elevated pressure environments.
Cable Length	5m, 10m, 25m, 50m, 100m, 200m
Cable Type	Single pair of PFA insulated conductors, laid flat with PFA jacket
Core / Strands	1/0.315mm
Conductor Cross Section 1/0.315 (mm²)	0.078
Outer Colour	Green
+ Colour	Green
- Colour	White
Drain Wire	No
Insulation Material	PFA Insulated
Loop Resistance 1/0.315 (Ohms per combined metre)	12.8
Max. Temperature	260°C
Min. Temperature	-75°C
+ Conductor	Nickel Chromium



- Conductor	Nickel Aluminium
Screen	No
Standards Met	Colour code (cores & jacket) to IEC-584-3
Thermocouple Type	K
Tolerance	Class 1