


**Cble / fil thermocouple paires plates Type T PFA  
IEC - brin 1/0,315 mm**

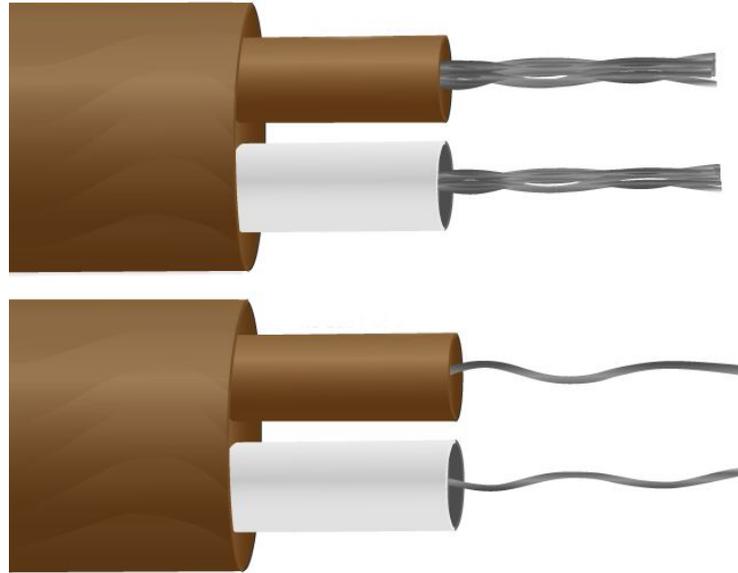

Labfacility are the UK's leading manufacturer of Temperature Sensors, Thermocouple Connectors and associated Temperature Instrumentation and stockings of Thermocouple Cables. The Company has been trading since 1971 and is ISO9001 accredited.

Cble / fil de thermocouple paires plates isolées en PFA - pos plat, cte cte et recouvert de PFA. Classe de tolérance 1

Vous ne trouvez pas ce dont vous avez besoin ? Appelez ou envoyez un e-mail notre équipe technique commerciale au +44 (0) 1243 871 280 ou [sales@labfacility.com](mailto:sales@labfacility.com) pour obtenir de l'aide dans la sélection des produits et le support technique

### Caractéristiques techniques

## Specifications

<b>General Description</b>	Resistant to oils, acids other adverse agents and fluids. Good mechanical strength and flexibility. PTFE better for steam/elevated pressure environments.
<b>Cable Length</b>	10m, 25m, 50m, 100m, 200m
<b>Cable Type</b>	PFA insulated, laid flat with PFA jacket
<b>Core / Strands</b>	1/0.315mm
<b>Conductor Cross Section 1/0.315 (mm<sup>2</sup>)</b>	0.078
<b>Outer Colour</b>	Brown
<b>+ Colour</b>	Brown
<b>- Colour</b>	White
<b>Drain Wire</b>	No
<b>Insulation Material</b>	PFA Insulated
<b>Loop Resistance 1/0.315 (Ohms per combined metre)</b>	6.5
<b>Max. Temperature</b>	260°C
<b>Min. Temperature</b>	-75°C
<b>+ Conductor</b>	Copper



# LABFACILITY

TEMPERATURE & PROCESS TECHNOLOGY

<b>- Conductor</b>	Constantan
<b>Screen</b>	No
<b>Standards Met</b>	Colour code (cores & jacket) to IEC-584-3
<b>Thermocouple Type</b>	T
<b>Tolerance</b>	Class 1