


Cble / fil paires plates isoles en fibre de verre Type K (ANSI) - brin de 1/0,315 mm

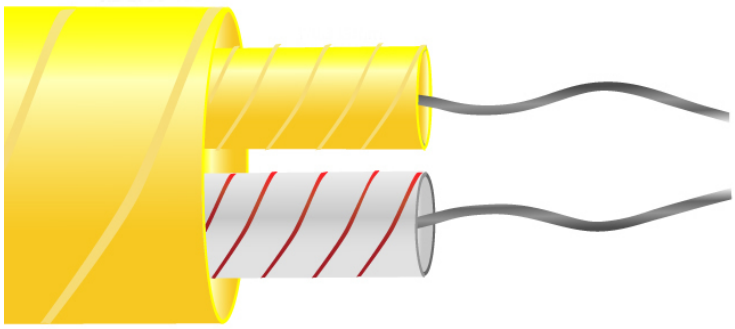

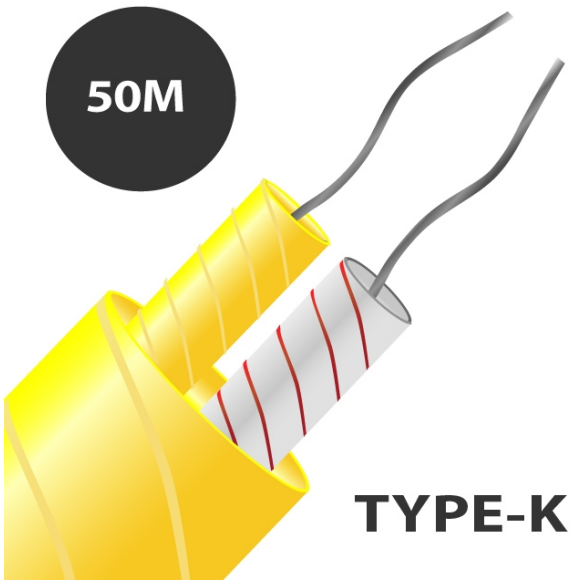

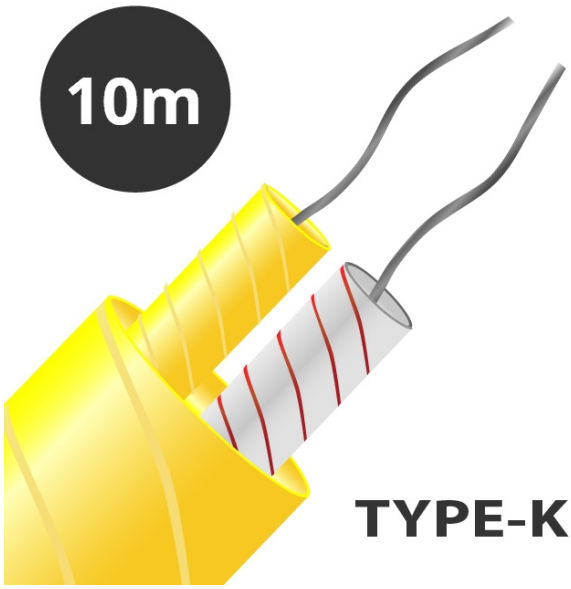

Labfacility are the UK's leading manufacturer of Temperature Sensors, Thermocouple Connectors and associated Temperature Instrumentation and stockings of Thermocouple Cables. The Company has been trading since 1971 and is ISO9001 accredited.

LABFACILITY
TEMPERATURE & PROCESS TECHNOLOGY

Datasheet

Cble / fil paires plates isoles en fibre de verre de type K (ANSI)

Construction paires plates isoles en fibre de verre, conducteurs poss plat, fibre de verre isole avec de la fibre de verre en gnral, silicone verni partout. Bonne rsistance la temprature mais pas adapte l o il y a des fluides.

Caractristiques techniques

Specifications

General Description	Good temperature range but will not prevent ingress of fluids. Fairly flexible but does not provide good mechanical protection.
Cable Length	10m, 25m, 50m, 100m, 200m
Cable Type	Flat pair cable
Core / Strands	1/0.315mm
Conductor Cross Section 1/0.315 (mm2)	0.078
Outer Colour	Yellow
+ Colour	Yellow
- Colour	Red
Drain Wire	No
Insulation Material	Glassfibre insulated
Loop Resistance 1/0.315 (Ohms per combined metre)	12.8
Max. Temperature	+350°C (short periods up to 400°C)
Min. Temperature	-60°C
+ Conductor	Nickel Chromium

- Conductor	Nickel Aluminium
Screen	No
Standards Met	Colour code (cores & jacket) to ANSI MC96.1
Thermocouple Type	K
Tolerance	Class 2