Cble / fil de thermocouple paires plates isoles en PVC Type K (IEC) - 13/0,2 mm

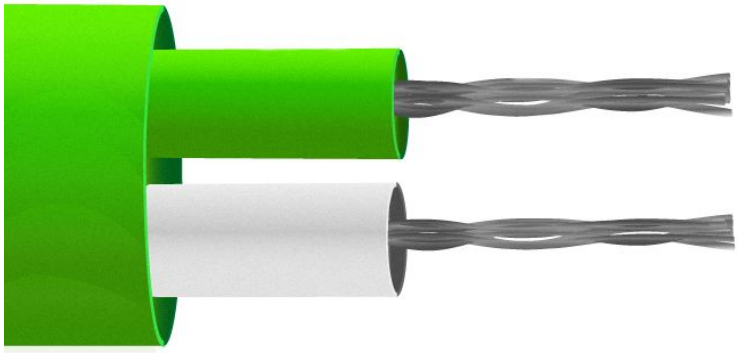



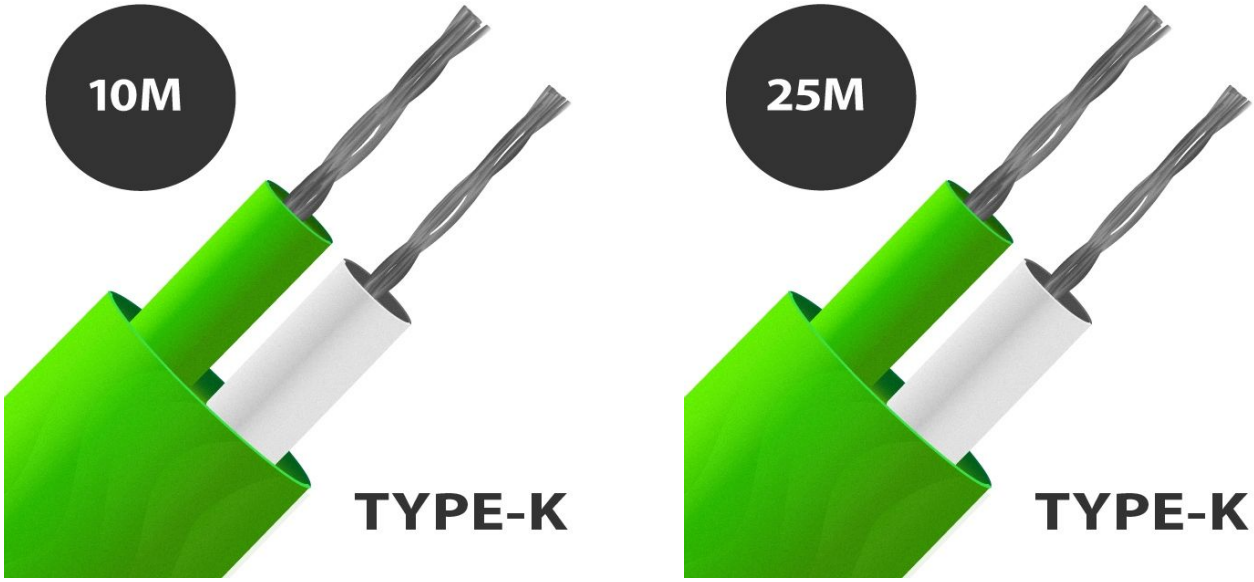

Labfacility are the UK's leading manufacturer of Temperature Sensors, Thermocouple Connectors and associated Temperature Instrumentation and stockings of Thermocouple Cables. The Company has been trading since 1971 and is ISO9001 accredited.

LABFACILITY
TEMPERATURE & PROCESS TECHNOLOGY

Datasheet

Cble / fil de thermocouple (IEC) type K paire isole en PVC paire plate

Le cble compensateur ressemble la caractristique thermolectrique du thermocouple concern sur une plage de temprature ambiante limite, typiquement de 0 80C. Comme ces cbles sont fabriqus partir de matriaux faible cot, des conomies peuvent tre ralises lors des installations dusine compares linstallation dun vritable cble dextension thermocouple.

Caractristiques techniques

Specifications

General Description	Good general purpose insulation for 'light' environments. Waterproof and very flexible.
Cable Length	10, 25, 50, 100 or 200m
Cable Type	Flat pair construction
Core / Strands	13/0.2mm
Conductor Cross Section 13/0.2 (mm2)	0.408
Outer Colour	Green
+ Colour	Green
- Colour	White
Drain Wire	No
Insulation Material	PVC Insulated
Loop Resistance 13/0.2 (Ohms per combined metre)	4.5
Max. Temperature	105°C
Min. Temperature	-10°C

+ Conductor	Nickel Chromium
- Conductor	Nickel Aluminium
Screen	No
Standards Met	Colour code (cores & jacket) to IEC-584-3
Thermocouple Type	K
Tolerance	Class 2