
Cble / fil de thermocouple paires plates Type K PFA IEC - brin 1/0,508 mm

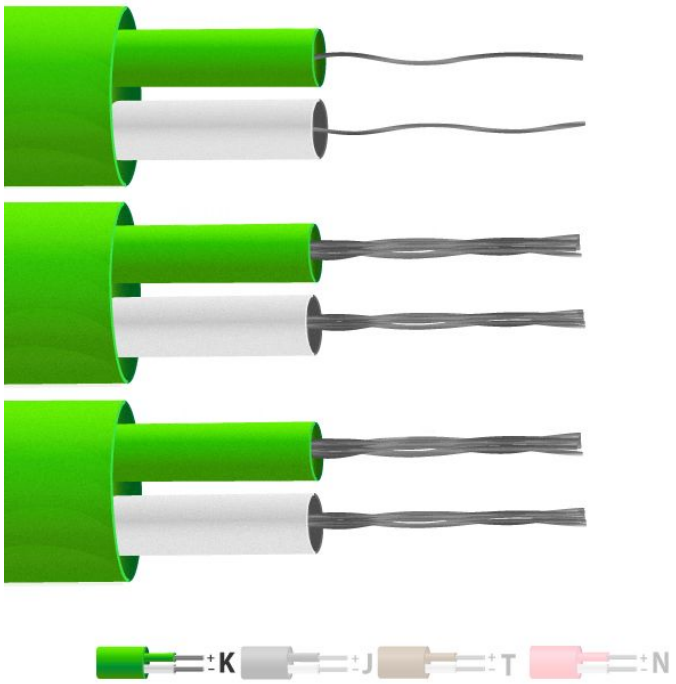

Labfacility are the UK's leading manufacturer of Temperature Sensors, Thermocouple Connectors and associated Temperature Instrumentation and stockings of Thermocouple Cables. The Company has been trading since 1971 and is ISO9001 accredited.

LABFACILITY
TEMPERATURE & PROCESS TECHNOLOGY

Datasheet

Cble / fil de thermocouple paires plates isoles en PFA - pos plat, cte cte et recouvert de PFA. Classe de tolrance 1

Vous ne trouvez pas ce dont vous avez besoin ? Appelez ou envoyez un e-mail notre quipe technique commerciale au +44 (0) 1243 871 280 ou sales@labfacility.com pour obtenir de laide dans la slection des produits et le support technique

Specifications

General Description	Resistant to oils, acids other adverse agents and fluids. Good mechanical strength and flexibility. PTFE better for steam/elevated pressure environments.
Cable Length	10m, 25m, 50m, 100m, 200m
Cable Type	Single pair of PFA insulated conductors, laid flat with PFA jacket
Core / Strands	1/0.508mm
Conductor Cross Section 1/0.508 (mm2)	0.203
Outer Colour	Green
+ Colour	Green
- Colour	White
Drain Wire	No
Insulation Material	PFA Insulated
Loop Resistance 1/0.508 (Ohms per combined metre)	4.9
Max. Temperature	260°C
Min. Temperature	-75°C
+ Conductor	Nickel Chromium
- Conductor	Nickel Aluminium
Screen	No

Standards Met	Colour code (cores & jacket) to IEC-584-3
Thermocouple Type	K
Tolerance	Class 1